

SPECIFICATION SHEET



USB-C To HDMI Audio/Video Adapter Converter With Power Delivery

- Connect to an external display with HDMI while charging the USB-C equipped mobile device
- Supports up to 3840x2160 at 30Hz resolution
- Reversible, symmetrical USB-C connector
- Plug and play no drivers required
- 3 year warranty

Specifications: USB-C To HDMI Audio/Video Adapter Converter With Power Delivery

Electrical Specifications:

Voltage Rating:	30V
Conductor Resistance:	34AWG 856.3Ω/km at 20°C
Insulation Resistance:	10m-km/min at 20°C DC 500V (EIA-364-21)
Dielectric Strength:	AC 500V/1 minute No breakdown (EIA-364-20)
USB-C Female Supplied Power:	60W (20V/3A)

Physical Specifications:

Operation Temperature:	0°C - 50°C; 15-85% RH (Non-Condensing)
Storage Temperature:	-25°C - 70°C; 15-85% RH (Non-Condensing)
Jacket:	PVC
Outer Diameter:	3.9 ± 0.1mm
Shield	Braid 16/9/0.06(TC)

Conductor 1: (2 Conductors, 4 Pair)

Conductor	34 AWG 7/.06(TC)
Insulation:	0.42 (HD-PE)
Shield:	Aluminum Mylar
Colour	P1 White / Brown P2 White / Red P3 White / Green P4 White / Blue

Conductor 2: (2 Conductors)


Conductor	28 AWG 7/.127(TC)
Insulation:	0.70 (HD-PE)
Colour	Red Black

Conductor 3: (6 Conductors)

Conductor	34 AWG 7/.06(TC)
Insulation:	0.42 (HD-PE)
Colour	White Green Brown Yellow Blue Orange



Specifications: USB-C To HDMI Audio/Video Adapter Converter With Power Delivery

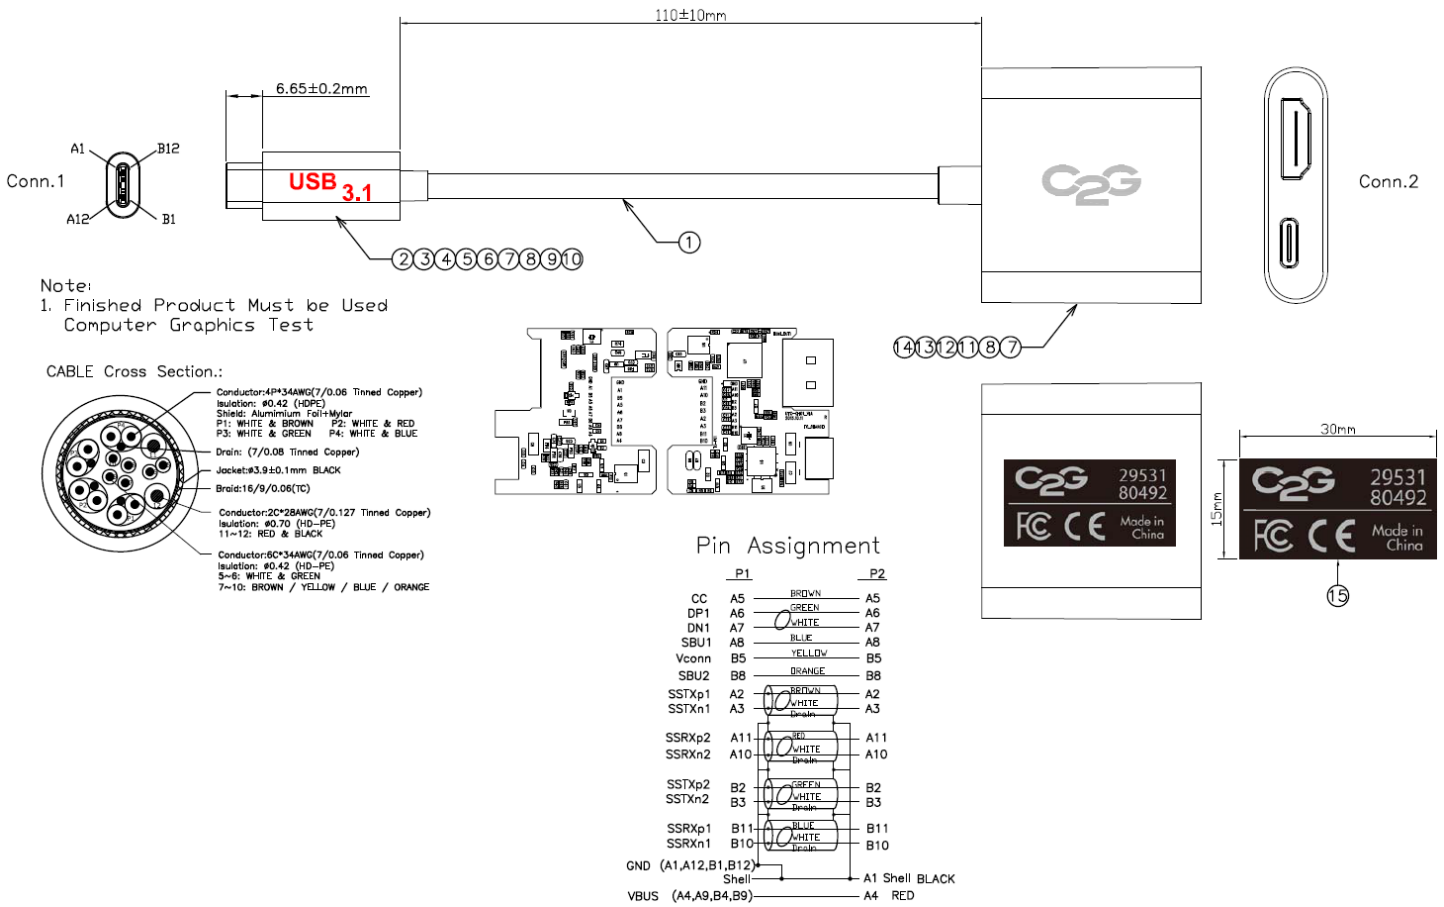

Part Number	Description	Weight (lbs)
80492	USB-C to HDMI Audio/Video Adapter Converter With Power Delivery-Black	.061
80493	USB-C to HDMI Audio/Video Adapter Converter With Power Delivery-White	.061



Great King Street North
Birmingham, West Midlands B19 2LF
UK Phone (0)800 328 2916
EMEA Phone +44 (0)1952 677300
www.c2g.com

Follow Us

