




Overview

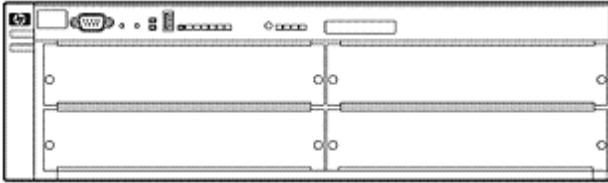


HP 4204 vl Switch Chassis

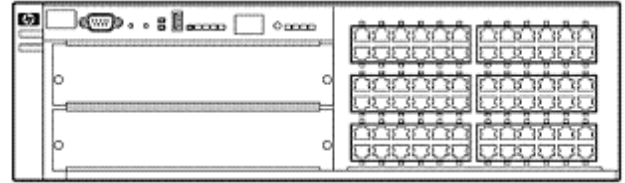


HP 4202-72 vl Switch

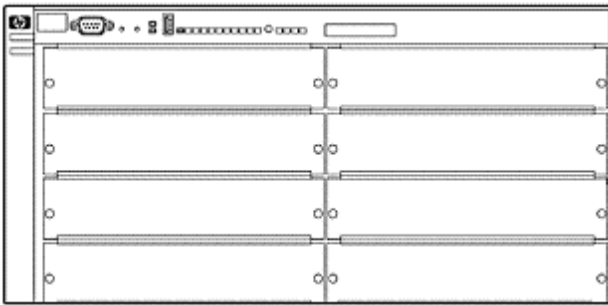


HP 4208 vl Switch Chassis

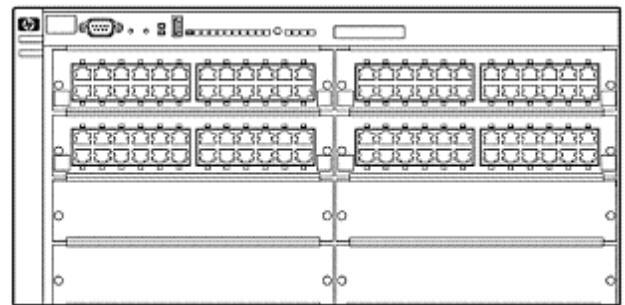

HP 4208-96 vl Switch

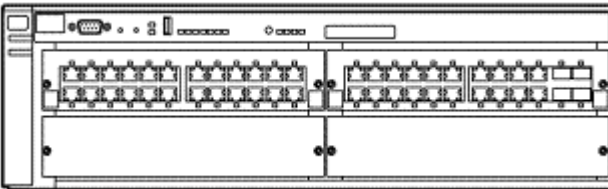

HP 4204-44G-4SFP vl Switch

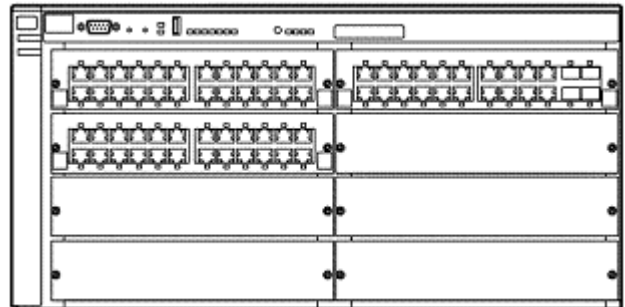

HP 4208-68G-4SFP vl Switch

Models

HP 4204 vl Switch Chassis

J8770A

HP 4202-72 vl Switch

J8772B

HP 4208 vl Switch Chassis

J8773A

HP 4208-96 vl Switch

J8775B

HP 4204-44G-4SFP vl Switch

J9064A

HP 4208-68G-4SFP vl Switch

J9030A

Overview

Key features

- Access layer
 - Layer 2 plus Static IP routing
 - Scalable 10/100/1000 connectivity
 - 10-GbE uplinks
-

Product overview

The HP 4200 vL Switch Series consists of modular chassis that provide a flexible, cost-effective LAN solution as an alternative to stackables. These switches offer a proven chassis form factor with high quality and reliability in 10/100, 10/100/1000, and 10-Gigabit scalable solutions that integrate easily into any network.

Features and Benefits

Quality of Service (QoS)

- **Traffic prioritization** (IEEE 802.1p): allows real-time traffic classification into eight priority levels mapped to eight queues
- **Class of Service (CoS)**: sets the IEEE 802.1p priority tag based on IP address, IP Type of Service (ToS), Layer 3 protocol, TCP/UDP port number, source port, and DiffServ
- **Layer 4 prioritization**: enables prioritization based on TCP/UDP port numbers

Management

- **Uni-Directional Link Detection (UDLD)**: monitors cable between two switches and shuts down the ports on both ends if the cable is broken, turning the bi-directional link into uni-directional; this prevents network problems such as loops

Connectivity

- **Auto-MDIX**: automatically adjusts for straight-through or crossover cables on all 10/100 and 10/100/1000 ports

Performance

- **Architecture**: up to 76.8 Gbps crossbar switching fabric provides wire-speed intra- and inter-module switching with up to 48 million pps throughput built on HP custom-designed ASIC technology

Resiliency and high availability

- **IEEE 802.3ad Link Aggregation Control Protocol (LACP)** and HP port trunking: support up to 60 trunks, each with up to 8 links (ports) per trunk
- **IEEE 802.1s Multiple Spanning Tree Protocol**: provides high link availability in multiple VLAN environments by allowing multiple spanning trees; encompasses IEEE 802.1D Spanning Tree Protocol and IEEE 802.1w Rapid Spanning Tree Protocol
- **Hot-swappable modules**: permit modules and mini-GBICs to be added or swapped without interrupting the network
- **Optional redundant power supply**: provides uninterrupted power; allows hot-swapping of one of the two supplies when installed

Manageability

- **sFlow (RFC 3176)**: wire-speed traffic accounting and monitoring
 - **RMON and XRMON**: provide advanced monitoring and reporting capabilities for statistics, history, alarms, and events
 - **Dual flash images**: provides independent primary and secondary operating system files for backup while upgrading
-

Overview

- **Multiple configuration files:** allows a configuration file to be stored to flash image
- **Friendly port names:** allow assignment of descriptive names to ports
- **Stacking capability:** single IP address management for a virtual stack of up to 16 switches, including the HP 2500 Series, 2510 Series, 2600 Series, 2800 Series, 2810 Series, 2900 Series, 3400 cl Series, 3500 yl Series, 4200 vl Series, 6108, 6200 yl, and 6400 cl Series Switches
- **Find-Fix-Inform:** finds and fixes common network problems automatically, then informs administrator
- **Software updates:** free downloads from the Web
- **Troubleshooting:** ingress and egress port monitoring enable network problem solving

Layer 2 switching

- **VLAN support and tagging:** supports IEEE 802.1Q (4,094 VLAN IDs) and 256 VLANs simultaneously
- **GARP VLAN Registration Protocol (GVRP):** allows automatic learning and dynamic assignment of VLANs

Layer 3 routing

- **Basic IP routing:** enables automatic routing to the connected VLANs and up to 16 static routes, including one default route, in IP networks

Security

- **Multiple user authentication methods:**
 - IEEE 802.1X: industry-standard method of user authentication using an IEEE 802.1X supplicant on the client in conjunction with a RADIUS server
 - Web-based authentication: similar to IEEE 802.1X, it provides a browser-based environment to authenticate clients that do not support the IEEE 802.1X supplicant
 - MAC-based authentication: client is authenticated with the RADIUS server based on the client's MAC address
- **Authentication flexibility:**
 - Multiple IEEE 802.1X users per port: provides authentication of up to eight IEEE 802.1X users per port; prevents user "piggybacking" on another user's IEEE 802.1X authentication
- **Dynamic ARP protection:** blocks ARP broadcasts from unauthorized hosts, preventing eavesdropping or theft of network data
- **Port security:** allows access only to specified MAC addresses, which can be learned or specified by the administrator
- **MAC address lockout:** prevents particular configured MAC addresses from connecting to the network
- **Secure File Transfer Protocol (FTP):** allows secure file transfer to and from the switch; protects against unwanted file downloads or unauthorized copying of switch configuration file
- **RADIUS/TACACS+:** eases switch management security administration by using a password authentication server
- **Source-port filtering:** allows only specified ports to communicate with each other
- **Secure Shell (SSHv2):** encrypts all transmitted data for secure, remote command-line interface (CLI) access over IP networks
- **Secure Sockets Layer (SSL):** encrypts all HTTP traffic, allowing secure access to the browser-based management GUI in the switch
- **Switch management logon security:** can require either RADIUS or TACACS+ authentication for secure switch CLI logon
- **Custom banner:** displays security policy when users log in to the switch
- **STP BPDU port protection:** blocks Bridge Protocol Data Units (BPDUs) on ports that do not require BPDUs, preventing forged BPDU attacks

Convergence

- **IP multicast (data-driven IGMPv3):** automatically prevents flooding of IP multicast traffic
- **IEEE 802.1AB Link Layer Discovery Protocol (LLDP):** is an automated device discovery protocol for easy mapping by network management applications

Overview

- **LLDP-MED** (Media Endpoint Discovery): is a standard extension of LLDP that stores values for parameters such as QoS and VLAN to automatically configure network devices such as IP phones

Warranty and Support

- **Lifetime warranty:** for as long as you own the product with advance replacement and next-business-day delivery (available in most countries)*
- **Electronic and telephone support:** limited electronic and telephone support is available from HP; refer to: www.hp.com/networking/warranty for details on the support provided and the period during which support is available
- **Software releases:** refer to: www.hp.com/networking/warranty for details on the software releases provided and the period during which software releases are available for your product(s)

* Hardware warranty replacement for as long as you own the product, with next business day advance replacement (available in most countries) with a five-year hardware warranty replacement for the disk drive included with HP AllianceONE Services zL Module, HP Threat Management Services zL Module, HP PCM+ Agent with AllianceONE Services zL Module, and HP E-MSM765 zL Mobility Controller. For details, refer to the HP Software License, Warranty, and Support booklet at: www.hp.com/networking/warranty.

Configuration

Build To Order:

BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

HP 4204 vL Switch Chassis

- 4 Open Module ports
- 1 J4839A HP gl/xl/vL Switch Redundant Pwr Supply included
- 3U - Height

J8770A
See Configuration
Note:1

HP 4202-72 vL Switch

- 2 Open Module ports
- 1 J4839A HP gl/xl/vL Switch Redundant Pwr Supply included
- 3U - Height

J8772B
See Configuration
Note:1

HP 4208 vL Switch Chassis

- 8 Open Module ports
- 1 J4839A HP gl/xl/vL Switch Redundant Pwr Supply included
- 3U - Height

J8773A
See Configuration
Note:1

HP 4208-96 vL Switch

- 8 total Module ports - 4 Open Module ports
- 4 J8765B HP 24-port 10/100-TX vL Module included
- 1 J4839A HP gl/xl/vL Switch Redundant Pwr Supply included
- 5U - Height

J8775B
See Configuration
Note:1, 2

HP 4204-44G-4SFP vL Switch

- 4 total Module ports - 2 Open Module ports
- 1 J8768A HP 24-port Gig-T vL Module included
- 1 J9033A HP 20-port Gig-T / 4-port SFP vL Module included
- 4 open mini-GBIC (SFP) slots
- min=0 \ max=4 SFP Transceivers
- 1 J4839A HP gl/xl/vL Switch Redundant Pwr Supply included
- 3U - Height

J9064A
See Configuration
Note:1, 2

HP 4208-68G-4SFP vL Switch

- 8 total Module ports - 5 Open Module ports
- 2 J8768A HP 24-port Gig-T vL Module included
- 1 J9033A HP 20-port Gig-T / 4-port SFP vL Module included
- 4 open mini-GBIC (SFP) slots
- min=0 \ max=4 SFP Transceivers
- 1 J4839A HP gl/xl/vL Switch Redundant Pwr Supply included
- 5U - Height

J9030A
See Configuration
Note:1, 2

Configuration Rules:

Note 1 The following Transceivers install into this switch:
HP X121 1G SFP LC SX Transceiver
HP X121 1G SFP LC LX Transceiver

J4858C
J4859C

Configuration

HP X111 100M SFP LC FX Transceiver	J9054C
HP X122 1G SFP LC BX-D Transceiver	J8177C
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X121 1G SFP LC LH Transceiver	J4860C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143A
HP X131 10G X2 SC ER Transceiver	J8438A
HP X130 CX4 Optical Media Converter	J8439A
HP X131 10G X2 SC SR Transceiver	J8436A
HP X131 10G X2 SC LR Transceiver	J8437A
HP X131 10G X2 SC LRM Transceiver	J9144A

Note 2 Localization required. (See Localization Menu for list.)

Factory Racked Models

HP 4204 vl Switch Chassis J8770A

- 4 Open Module ports
- 1 J4839A HP gl/xl/vl Switch Redundant Pwr Supply included
- 3U - Height

HP 4202-72 vl Switch J8772B

- 2 Open Module ports
- 1 J4839A HP gl/xl/vl Switch Redundant Pwr Supply included
- 3U - Height

HP 4208 vl Switch Chassis J8773A

- 8 Open Module ports
- 1 J4839A HP gl/xl/vl Switch Redundant Pwr Supply included
- 3U - Height

HP 4208-96 vl Switch J8775B

- 8 total Module ports - 4 Open Module ports
- 4 J8765B HP 24-port 10/100-TX vl Module included
- 1 J4839A HP gl/xl/vl Switch Redundant Pwr Supply included
- 5U - Height

See Configuration
Note:1

HP 4204-44G-4SFP vl Switch J9064A

- 4 total Module ports - 2 Open Module ports
- 1 J8768A HP 24-port Gig-T vl Module included
- 1 J9033A HP 20-port Gig-T / 4-port SFP vl Module included
- 4 open mini-GBIC (SFP) slots
- min=0 \ max=4 SFP Transceivers
- 1 J4839A HP gl/xl/vl Switch Redundant Pwr Supply included
- 3U - Height

See Configuration
Note:1

Configuration

HP 4208-68G-4SFP vl Switch

- 8 total Module ports - 5 Open Module ports
- 2 J8768A HP 24-port Gig-T vl Module included
- 1 J9033A HP 20-port Gig-T / 4-port SFP vl Module included
- 4 open mini-GBIC (SFP) slots
- min=0 \ max=4 SFP Transceivers
- 1 J4839A HP gl/xl/vl Switch Redundant Pwr Supply included
- 5U - Height

J9030A
See Configuration
Note:1

Configuration Rules:

Note 1 The following Transceivers install into this switch:

HP X121 1G SFP LC SX Transceiver	J4858C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X111 100M SFP LC FX Transceiver	J9054C
HP X122 1G SFP LC BX-D Transceiver	J8177C
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X121 1G SFP LC LH Transceiver	J4860C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143A
HP X131 10G X2 SC ER Transceiver	J8438A
HP X130 CX4 Optical Media Converter	J8439A
HP X131 10G X2 SC SR Transceiver	J8436A
HP X131 10G X2 SC LR Transceiver	J8437A
HP X131 10G X2 SC LRM Transceiver	J9144A

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

Modules

J8770A Only System (std 0 // max=4) User Selection (min 0 / max=4) per Chassis

J8772B Only System (std 0 // max=2) User Selection (min 0 / max=2) per Chassis

J8773B Only System (std 0 // max=8) User Selection (min 0 / max=8) per Chassis

J8775B Only System (std 4 // max=8) User Selection (min 0 / max=4) per Chassis

J9064A Only System (std 2 // max=4) User Selection (min 0 / max=2) per Chassis

J9030A Only System (std 3 // max=8) User Selection (min 0 / max=5) per Chassis

HP 12-port 100FX MTRJ vl Module J8763A

HP 24-port 10/100-TX vl Module J8765B



Configuration

HP 24-port Gig-T vl Module	J8768A
HP 4-port Mini-GBIC vl Module	J8776A
<ul style="list-style-type: none">min=0 \ max=4 SFP Transceivers	See Configuration Note:1
HP 20-port Gig-T / 4-port SFP vl Module	J9033A
<ul style="list-style-type: none">min=0 \ max=4 SFP Transceivers	See Configuration Note:1
HP 1-port 10GbE X2 vl Module	J8766A
<ul style="list-style-type: none">min=0 \ max=1 SFP Transceivers	See Configuration Note:1

Configuration Rules:

Note 1	The following Transceivers install into this switch:	
	HP X121 1G SFP LC SX Transceiver	J4858C
	HP X121 1G SFP LC LX Transceiver	J4859C
	HP X111 100M SFP LC FX Transceiver	J9054C
	HP X122 1G SFP LC BX-D Transceiver	J8177C
	HP X112 100M SFP LC BX-D Transceiver	J9099B
	HP X112 100M SFP LC BX-U Transceiver	J9100B

Transceivers

SFP Transceivers

HP X121 1G SFP LC SX Transceiver	J4858C
HP X121 1G SFP LC LX Transceiver	J4859C
HP X111 100M SFP LC FX Transceiver	J9054C
HP X121 1G SFP LC LH Transceiver	J4860C
HP X121 1G SFP RJ45 T Transceiver	J8177C
HP X122 1G SFP LC BX-D Transceiver	J9142B
HP X122 1G SFP LC BX-U Transceiver	J9143B
HP X112 100M SFP LC BX-D Transceiver	J9099B
HP X112 100M SFP LC BX-U Transceiver	J9100B
HP X131 10G X2 SC ER Transceiver	J8438A
HP X131 10G X2 SC SR Transceiver	J8436A
HP X131 10G X2 SC LR Transceiver	J8437A
HP X131 10G X2 SC LRM Transceiver	J9144A

Internal Power Supplies

Configuration

System (std 1 // max=2) User Selection (min 0 / max=1) per Chassis

HP gl/xl/vl Switch Redundant Pwr Supply J4839A

Cables

Multi-Mode Cables

HP .5m Multi-mode OM3 LC/LC FC Cable	AJ833A
HP 1m Multi-mode OM3 LC/LC FC Cable	AJ834A
HP 2 m Multimode OM3 LC/LC FC Cable	AJ835A
HP 5 m Multimode OM3 LC/LC FC Cable	AJ836A
HP 15 m Multimode OM3 LC/LC FC Cable	AJ837A
HP 30 m Multimode OM3 LC/LC FC Cable	AJ838A
HP 50 m Multimode OM3 LC/LC FC Cable	AJ839A
HP Premier Flex LC/LC OM4 2f 1m Cbl	QK732A
HP Premier Flex LC/LC OM4 2f 2m Cbl	QK733A
HP Premier Flex LC/LC OM4 2f 5m Cbl	QK734A
HP Premier Flex LC/LC OM4 2f 15m Cbl	QK735A
HP Premier Flex LC/LC OM4 2f 30m Cbl	QK736A
HP Premier Flex LC/LC OM4 2f 50m Cbl	QK737A

Switch Enclosure Options

Software

HP IDM v3 Software w/500-user License	J9438A
HP IDM v3 additional 1000-user License	J9440A
HP IDM v3 Software w/Unltd-user License	J9439A

Technical Specifications

HP 4204 vL Switch Chassis Ports (J8770A)	Ports	4 open module slots Supports a maximum of 96 autosensing 10/100 ports or 96 autosensing 10/100/1000 ports or 16 mini-GBICs or 4 10-GbE ports, or a combination
Power supplies	Power supplies	2 power supply slots includes: 1 x J4839A (HP gl/xl/vL Switch Redundant Power Supply)
Physical characteristics	Dimensions	15.3(d) x 17.4(w) x 5.25(h) in. (38.86 x 44.2 x 13.34 cm) (3U height)
Physical characteristics	Weight	20.75 lb. (9.41 kg), Fully loaded
Memory and processor	Fabric	Motorola PowerPC MPC8245 @ 330 MHz, 24 MB flash, 64 MB SDRAM; packet buffer size: 36 MB
Mounting		Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	Latency	<6 μ s (FIFO)
Performance	Throughput	Up to 24 million pps
Performance	Switch fabric speed	38.4 Gbps
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
Environment	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
Environment	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
Environment	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
Environment	Altitude	up to 15,000 ft. (4.6 km)
Environment	Acoustic	Power: 64.2 dB; DIN 45635T.19 per ISO 7779
Electrical characteristics	Maximum heat dissipation	2152 BTU/hr (2270 kJ/hr)
Electrical characteristics	Voltage	100-127 / 200-240 VAC
Electrical characteristics	Current	8.2 / 3.8 A
Electrical characteristics	Maximum power rating	630 W
Electrical characteristics	Frequency	50 / 60 Hz
Electrical characteristics	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with 100% traffic, all ports plugged in, and all modules populated.
Safety		CSA 22.2 No. 950; UL 60950; EN 60950
Emissions		FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; CISPR 22 Class A; EN 55024; IEC/EN 61000-3-2; IEC/EN 61000-3-3
Immunity	EN	EN 55024, CISPR 24
Immunity	ESD	IEC 61000-4-2
Immunity	Radiated	IEC 61000-4-3
Immunity	EFT/Burst	IEC 61000-4-4

Technical Specifications

Surge	IEC 61000-4-5
Conducted	IEC 61000-4-6
Power frequency magnetic field	IEC 61000-4-8
Voltage dips and interruptions	IEC 61000-4-11
Harmonics	EN 61000-3-2, IEC 61000-3-2
Flicker	EN 61000-3-3, IEC 61000-3-3

Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (DB-9 serial port console); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" (product number ends with the letter "B", e.g., J4858B, J4859B) or later are required. When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UE241E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UE242E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UE243E)</p> <p>3-year, 24x7 SW phone support, software updates (UE263E)</p> <p>Installation with minimum configuration, system-based pricing (U4827E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4831E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UR876E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UR877E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR878E)</p> <p>4-year, 24x7 SW phone support, software updates (UR879E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UR880E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UR881E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR882E)</p> <p>5-year, 24x7 SW phone support, software updates (UR883E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW347E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW348E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UW349E)</p>

Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 4202-72 vL Switch (J8772B)	Ports	<p>2 open module slots</p> <p>72 autosensing 10/100 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX); Media Type: Auto-MDIX; Duplex: half or full</p> <p>Supports a maximum of 120 autosensing 10/100 ports or 48 Gigabit ports or 8 mini-GBICs or 2 10-GbE ports, or a combination</p>
--------------------------------------	--------------	--

Technical Specifications

Power supplies	2 power supply slots includes: 1 x J4839A (HP gl/xl/vl Switch Redundant Power Supply)	
Physical characteristics	Dimensions	15.3(d) x 17.4(w) x 5.25(h) in. (38.86 x 44.2 x 13.34 cm) (3U height)
	Weight	23.81 lb. (10.8 kg), Fully loaded
Memory and processor	Fabric	Motorola PowerPC MPC8245 @ 330 MHz, 24 MB flash, 64 MB SDRAM; packet buffer size: 36 MB
Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only	
Performance	Latency	<6 μ s (FIFO)
	Throughput	up to 22.4 million pps
	Switch fabric speed	33.6 Gbps
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 15,000 ft. (4.6 km)
Electrical characteristics	Acoustic	Power: 64.2 dB; DIN 45635T.19 per ISO 7779
	Maximum heat dissipation	2152 BTU/hr (2270 kJ/hr)
	Voltage	100-127 / 200-240 VAC
	Current	8.2 / 3.8 A
	Maximum power rating	630 W
	Frequency	50 / 60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with 100% traffic, all ports plugged in, and all modules populated.
Safety	CSA 22.2 No. 950; UL 60950; EN 60950	
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; CISPR 22 Class A; EN 55024; IEC/EN 61000-3-2; IEC/EN 61000-3-3	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6

Technical Specifications

	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3
Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (DB-9 serial port console); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB	
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" (product number ends with the letter "B", e.g., J4858B, J4859B) or later are required. When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.	
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UE247E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UE248E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UE249E)</p> <p>3-year, 24x7 SW phone support, software updates (UE265E)</p> <p>Installation with minimum configuration, system-based pricing (U4827E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4831E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UR892E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UR893E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR894E)</p> <p>4-year, 24x7 SW phone support, software updates (UR895E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UR896E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UR897E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR898E)</p> <p>5-year, 24x7 SW phone support, software updates (UR899E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW353E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW354E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UW355E)</p>	
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP 4208 vL Switch Chassis Ports (J8773A)

	Ports	8 open module slots Supports a maximum of 192 autosensing 10/100 ports or 192 autosensing 10/100/1000 ports or 32 mini-GBICs or 4 10-GbE ports, or a combination
	Power supplies	2 power supply slots includes: 1 x J4839A (HP gl/xl/vL Switch Redundant Power Supply)
	Physical characteristics	Dimensions 15.3(d) x 17.4(w) x 8.75(h) in. (38.86 x 44.2 x 22.23 cm) (5U height)
		Weight 26.85 lb. (12.18 kg), Fully loaded

Technical Specifications

Memory and processor	Fabric	Motorola PowerPC MPC8245 @ 330 MHz, 24 MB flash, 64 MB SDRAM; packet buffer size: 36 MB
Mounting		Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	Latency	<6 μ s (FIFO)
	Throughput	up to 48 million pps
	Switch fabric speed	76.8 Gbps
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 15,000 ft. (4.6 km)
	Acoustic	Power: 63.1 dB; DIN 45635T.19 per ISO 7779
Electrical characteristics	Maximum heat dissipation	2152 BTU/hr (2270 kJ/hr)
	Voltage	100-127 / 200-240 VAC
	Current	8.2 / 3.8 A
	Maximum power rating	630 W
	Frequency	50 / 60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with 100% traffic, all ports plugged in, and all modules populated.
	Safety	CSA 22.2 No. 950; UL 60950; EN 60950
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; CISPR 22 Class A; EN 55024; IEC/EN 61000-3-2; IEC/EN 61000-3-3	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3

Technical Specifications

Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (DB-9 serial port console); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" (product number ends with the letter "B", e.g., J4858B, J4859B) or later are required. When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UE244E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UE245E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UE246E)</p> <p>3-year, 24x7 SW phone support, software updates (UF787E)</p> <p>Installation with minimum configuration, system-based pricing (U4827E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4831E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UR908E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UR909E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR910E)</p> <p>4-year, 24x7 SW phone support, software updates (UR911E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UR912E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UR913E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR914E)</p> <p>5-year, 24x7 SW phone support, software updates (UR915E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW350E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW351E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UW352E)</p>
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 4208-96 vL Switch (J8775B)	Included accessories	4 HP 24-port 10/100-TX vL Modules (J8765B)	
	Ports	<p>4 open module slots</p> <p>96 autosensing 10/100 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX); Media Type: Auto-MDIX; Duplex: half or full</p> <p>Supports a maximum of 192 autosensing 10/100 ports or 96 autosensing 10/100/1000 ports or 16 mini-GBICs or 4 10-GbE ports, or a combination</p>	
	Power supplies	<p>2 power supply slots</p> <p>includes: 1 x J4839A (HP gl/xl/vL Switch Redundant Power Supply)</p>	
	Physical characteristics	Dimensions	15.3(d) x 17.4(w) x 8.75(h) in. (38.86 x 44.2 x 22.23 cm) (5U height)
		Weight	32.3 lb. (14.65 kg), Fully loaded
	Memory and processor	Fabric	Motorola PowerPC MPC8245 @ 330 MHz, 24 MB flash, 64 MB SDRAM; packet buffer size: 36 MB

Technical Specifications

Mounting	Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	<p>Latency <6 μs (FIFO)</p> <p>Throughput up to 48 million pps</p> <p>Switch fabric speed 76.8 Gbps</p>
Environment	<p>Operating temperature 32°F to 104°F (0°C to 40°C)</p> <p>Operating relative humidity 15% to 95% @ 104°F (40°C), noncondensing</p> <p>Nonoperating/Storage temperature -40°F to 158°F (-40°C to 70°C)</p> <p>Nonoperating/Storage relative humidity 15% to 95% @ 149°F (65°C), noncondensing</p> <p>Altitude up to 15,000 ft. (4.6 km)</p> <p>Acoustic Power: 64.2 dB; DIN 45635T.19 per ISO 7779</p>
Electrical characteristics	<p>Maximum heat dissipation 2152 BTU/hr (2270 kJ/hr)</p> <p>Voltage 100-127 / 200-240 VAC</p> <p>Current 8.2 / 3.8 A</p> <p>Maximum power rating 630 W</p> <p>Frequency 50 / 60 Hz</p> <p>Notes Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with 100% traffic, all ports plugged in, and all modules populated.</p>
Safety	CSA 22.2 No. 950; UL 60950; EN 60950
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; CISPR 22 Class A; EN 55024; IEC/EN 61000-3-2; IEC/EN 61000-3-3
Immunity	<p>EN EN 55024, CISPR 24</p> <p>ESD IEC 61000-4-2</p> <p>Radiated IEC 61000-4-3</p> <p>EFT/Burst IEC 61000-4-4</p> <p>Surge IEC 61000-4-5</p> <p>Conducted IEC 61000-4-6</p> <p>Power frequency magnetic field IEC 61000-4-8</p> <p>Voltage dips and interruptions IEC 61000-4-11</p> <p>Harmonics EN 61000-3-2, IEC 61000-3-2</p> <p>Flicker EN 61000-3-3, IEC 61000-3-3</p>

Technical Specifications

Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (DB-9 serial port console); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" (product number ends with the letter "B", e.g., J4858B, J4859B) or later are required. When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UE244E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UE245E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UE246E)</p> <p>3-year, 24x7 SW phone support, software updates (UF787E)</p> <p>Installation with minimum configuration, system-based pricing (U4827E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4831E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UR908E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UR909E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR910E)</p> <p>4-year, 24x7 SW phone support, software updates (UR911E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UR912E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UR913E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR914E)</p> <p>5-year, 24x7 SW phone support, software updates (UR915E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW350E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW351E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UW352E)</p>
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 4204-44G-4SFP vL Switch (J9064A)	Included accessories	1 HP 24-port Gig-T vL Module (J8768A) 1 HP 20-port Gig-T / 4-port SFP vL Module (J9033A)
	Ports	2 open module slots 44 autosensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only 4 open mini-GBIC (SFP) slots Supports a maximum of 48 autosensing 10/100 ports or 92 autosensing 10/100/1000 ports or 12 mini-GBICs or 2 10-GbE ports, or a combination
	Power supplies	2 power supply slots includes: 1 x J4839A (HP gl/xl/vL Switch Redundant Power Supply)
	Physical characteristics	Dimensions 15.3(d) x 17.4(w) x 5.25(h) in. (38.86 x 44.2 x 13.34 cm) (3U height) Weight 24.45 lb. (11.09 kg), Fully loaded

Technical Specifications

Memory and processor	Fabric	Motorola PowerPC MPC8245 @ 330 MHz, 24 MB flash, 64 MB SDRAM; packet buffer size: 36 MB
Mounting		Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	Latency	<6 μ s (FIFO)
	Throughput	up to 24 million pps
	Switch fabric speed	38.4 Gbps
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 15,000 ft. (4.6 km)
	Acoustic	Power: 64.2 dB; DIN 45635T.19 per ISO 7779
Electrical characteristics	Maximum heat dissipation	2152 BTU/hr (2270 kJ/hr)
	Voltage	100-127 / 200-240 VAC
	Current	8.2 / 3.8 A
	Maximum power rating	630 W
	Frequency	50 / 60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with 100% traffic, all ports plugged in, and all modules populated.
	Safety	CSA 22.2 No. 950; UL 60950; EN 60950
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; CISPR 22 Class A; EN 55024; IEC/EN 61000-3-2; IEC/EN 61000-3-3	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3

Technical Specifications

Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (DB-9 serial port console); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" (product number ends with the letter "B", e.g., J4858B, J4859B) or later are required. When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	<p>3-year, 4-hour onsite, 13x5 coverage for hardware (UE241E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UE242E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UE243E)</p> <p>3-year, 24x7 SW phone support, software updates (UE263E)</p> <p>Installation with minimum configuration, system-based pricing (U4827E)</p> <p>Installation with HP-provided configuration, system-based pricing (U4831E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UR876E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UR877E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR878E)</p> <p>4-year, 24x7 SW phone support, software updates (UR879E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UR880E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UR881E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR882E)</p> <p>5-year, 24x7 SW phone support, software updates (UR883E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW347E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW348E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UW349E)</p>
	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 4208-68G-4SFP vL Switch (J9030A)	Included accessories	2 HP 24-port Gig-T vL Modules (J8768A) 1 HP 20-port Gig-T / 4-port SFP vL Module (J9033A)				
	Ports	5 open module slots 68 autosensing 10/100/1000 ports (IEEE 802.3 Type 10Base-T, IEEE 802.3u Type 100Base-TX, IEEE 802.3ab Type 1000Base-T); Media Type: Auto-MDIX; Duplex: 10Base-T/100Base-TX: half or full; 1000Base-T: full only 4 open mini-GBIC (SFP) slots Supports a maximum of 120 autosensing 10/100 ports or 188 autosensing 10/100/1000 ports or 24 mini-GBICs or 4 10-GbE ports, or a combination				
	Power supplies	2 power supply slots includes: 1 x J4839A (HP gl/xl/vL Switch Redundant Power Supply)				
	Physical characteristics	<table border="0"> <tr> <td style="vertical-align: top;">Dimensions</td> <td>15.3(d) x 17.4(w) x 8.75(h) in. (38.86 x 44.2 x 22.23 cm) (5U height)</td> </tr> <tr> <td style="vertical-align: top;">Weight</td> <td>30.88 lb. (14.01 kg), Fully loaded</td> </tr> </table>	Dimensions	15.3(d) x 17.4(w) x 8.75(h) in. (38.86 x 44.2 x 22.23 cm) (5U height)	Weight	30.88 lb. (14.01 kg), Fully loaded
Dimensions	15.3(d) x 17.4(w) x 8.75(h) in. (38.86 x 44.2 x 22.23 cm) (5U height)					
Weight	30.88 lb. (14.01 kg), Fully loaded					

Technical Specifications

Memory and processor	Fabric	Motorola PowerPC MPC8245 @ 330 MHz, 24 MB flash, 64 MB SDRAM; packet buffer size: 36 MB
Mounting		Mounts in an EIA-standard 19 in. telco rack or equipment cabinet (hardware included); horizontal surface mounting only
Performance	Latency	<6 μ s (FIFO)
	Throughput	up to 48 million pps
	Switch fabric speed	76.8 Gbps
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	15% to 95% @ 104°F (40°C), noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	15% to 95% @ 149°F (65°C), noncondensing
	Altitude	up to 15,000 ft. (4.6 km)
	Acoustic	Power: 64.2 dB; DIN 45635T.19 per ISO 7779
Electrical characteristics	Maximum heat dissipation	2152 BTU/hr (2270 kJ/hr)
	Voltage	100-127 / 200-240 VAC
	Current	8.2 / 3.8 A
	Maximum power rating	630 W
	Frequency	50 / 60 Hz
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with 100% traffic, all ports plugged in, and all modules populated.
	Safety	CSA 22.2 No. 950; UL 60950; EN 60950
Emissions	FCC Class A; VCCI Class A; EN 55022/CISPR 22 Class A; CISPR 22 Class A; EN 55024; IEC/EN 61000-3-2; IEC/EN 61000-3-3	
Immunity	EN	EN 55024, CISPR 24
	ESD	IEC 61000-4-2
	Radiated	IEC 61000-4-3
	EFT/Burst	IEC 61000-4-4
	Surge	IEC 61000-4-5
	Conducted	IEC 61000-4-6
	Power frequency magnetic field	IEC 61000-4-8
	Voltage dips and interruptions	IEC 61000-4-11
	Harmonics	EN 61000-3-2, IEC 61000-3-2
	Flicker	EN 61000-3-3, IEC 61000-3-3

Technical Specifications

Management	HP PCM+; HP PCM (included); command-line interface; Web browser; configuration menu; out-of-band management (DB-9 serial port console); IEEE 802.3 Ethernet MIB; Repeater MIB; Ethernet Interface MIB
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" (product number ends with the letter "B", e.g., J4858B, J4859B) or later are required. When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g., J4858B, J4859C) are required.
Services	3-year, 4-hour onsite, 13x5 coverage for hardware (UE244E) 3-year, 4-hour onsite, 24x7 coverage for hardware (UE245E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (UE246E) 3-year, 24x7 SW phone support, software updates (UF787E) Installation with minimum configuration, system-based pricing (U4827E) Installation with HP-provided configuration, system-based pricing (U4831E) 4-year, 4-hour onsite, 13x5 coverage for hardware (UR908E) 4-year, 4-hour onsite, 24x7 coverage for hardware (UR909E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR910E) 4-year, 24x7 SW phone support, software updates (UR911E) 5-year, 4-hour onsite, 13x5 coverage for hardware (UR912E) 5-year, 4-hour onsite, 24x7 coverage for hardware (UR913E) 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UR914E) 5-year, 24x7 SW phone support, software updates (UR915E) 3 Yr 6 hr Call-to-Repair Onsite (UW350E) 4 Yr 6 hr Call-to-Repair Onsite (UW351E) 5 Yr 6 hr Call-to-Repair Onsite (UW352E) Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
Standards and protocols (applies to all products in series)	Device management HTML and telnet management General protocols IEEE 802.1D MAC Bridges IEEE 802.1p Priority IEEE 802.1Q VLANs IEEE 802.1s Multiple Spanning Trees IEEE 802.1w Rapid Reconfiguration of Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.3x Flow Control RFC 768 UDP RFC 783 TFTP Protocol (revision 2) RFC 791 IP RFC 792 ICMP RFC 793 TCP RFC 826 ARP RFC 854 TELNET

Technical Specifications

RFC 1542 BOOTP Extensions
RFC 2030 Simple Network Time Protocol (SNTP) v4
RFC 3046 DHCP Relay Agent Information Option

IP multicast

RFC 3376 IGMPv3

MIBs

RFC 1213 MIB II
RFC 1493 Bridge MIB
RFC 2613 SMON MIB
RFC 2618 RADIUS Client MIB
RFC 2665 Ethernet-Like-MIB
RFC 2668 802.3 MAU MIB
RFC 2737 Entity MIB (Version 2)

Network management

IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
RFC 1757 RMON 4 groups: Stats, History, Alarms and Events
RFC 2819 Four groups of RMON: 1 (statistics), 2 (history), 3 (alarm) and 9 (events)
RFC 3164 BSD syslog Protocol
RFC 3176 sFlow
ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)
SNMPv1/v2c/v3
XRMON

QoS/CoS

RFC 2474 DiffServ Precedence, including 8 queues/port
RFC 2597 DiffServ Assured Forwarding (AF)
RFC 2598 DiffServ Expedited Forwarding (EF)

Security

IEEE 802.1X Port Based Network Access Control
RFC 2138 RADIUS Authentication
Secure Sockets Layer (SSL)
SSHv2 Secure Shell

Accessories

HP 4200 vl Switch Series accessories

Modules	HP 12-port 100FX MTRJ vl Module	J8763A
	HP 24-port 10/100-TX vl Module	J8765B
	HP 24-port Gig-T vl Module	J8768A
	HP 4-port Mini-GBIC vl Module	J8776A
	HP 20-port Gig-T / 4-port SFP vl Module	J9033A
	HP 1-port 10GbE X2 vl Module	J8766A
Transceivers	HP X131 10G X2 SC ER Transceiver	J8438A
	HP X130 CX4 Optical Media Converter	J8439A
	HP X131 10G X2 SC SR Transceiver	J8436A
	HP X131 10G X2 CX4 Transceiver	J8440C
	HP X111 100M SFP LC FX Transceiver	J9054B
	HP X131 10G X2 SC LR Transceiver	J8437A
	HP X131 10G X2 SC LRM Transceiver	J9144A
	HP X112 100M SFP LC BX-D Transceiver	J9099B
	HP X112 100M SFP LC BX-U Transceiver	J9100B
	HP X121 1G SFP LC LH Transceiver	J4860C
	HP X121 1G SFP LC SX Transceiver	J4858C
	HP X121 1G SFP LC LX Transceiver	J4859C
	HP X121 1G SFP RJ45 T Transceiver	J8177C
	HP X122 1G SFP LC BX-D Transceiver	J9142B
	HP X122 1G SFP LC BX-U Transceiver	J9143B
	Cables	NEW HP 0.5 m Multimode OM3 LC/LC Optical Cable
NEW HP 1 m Multimode OM3 LC/LC Optical Cable		AJ834A
NEW HP 2 m Multimode OM3 LC/LC Optical Cable		AJ835A
NEW HP 5 m Multimode OM3 LC/LC Optical Cable		AJ836A
NEW HP 15 m Multimode OM3 LC/LC Optical Cable		AJ837A
NEW HP 30 m Multimode OM3 LC/LC Optical Cable		AJ838A
NEW HP 50 m Multimode OM3 LC/LC Optical Cable		AJ839A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable		QK732A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable		QK733A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable		QK734A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable		QK735A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable		QK736A
NEW HP Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable		QK737A
EPS/RPS	HP gl/xl/vl Switch Redundant Pwr Supply	J4839A
Software	HP Identity Driven Manager 3.0 Software--500-User License	J9438A
	HP Identity Driven Manager 3.0 Software--Additional 1,000-User License	J9440A
	HP Identity Driven Manager 3.0 Software--Unlimited-User License	J9439A

Accessory Product Details

NOTE: Details are not available for all accessories. The following specifications were available at the time of publication.

HP 12-port 100FX MTRJ v1 Ports Module (J8763A)	12 MTRJ 100BASE-FX ports (IEEE 802.3u Type 100BASE-FX); Duplex: half or full
Physical characteristics	Dimensions 8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)
	Weight 1.79 lb. (0.81 kg)
Cabling	Cable type: 62.5/125 μ m or 50/125 μ m (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Maximum distance: • 2 km (full duplex) or 412 m (half-duplex)
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 24-port 10/100-TX v1 Ports Module (J8765B)	24 RJ-45 autosensing 10/100 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX); Media Type: Auto-MDIX; Duplex: half or full
Physical characteristics	Dimensions 8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)
	Weight 1.43 lb. (0.65 kg)
Cabling	Cable type: 100BASE-TX: Category 5 (or better), 100 Ω differential unshielded twisted pair (UTP) or shielded twisted pair (STP), complying with IEEE 802.3u 100BASE-TX; Maximum distance: • 100 meters
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 24-port Gig-T v1 Module (J8768A)	Ports	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)</td> </tr> <tr> <td>Weight</td> <td>1.23 lb. (0.56 kg)</td> </tr> </table>	Dimensions	8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)	Weight	1.23 lb. (0.56 kg)
	Dimensions	8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)				
	Weight	1.23 lb. (0.56 kg)				
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Û differential 4 pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T				
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 4-port Mini-GBIC v1 Module (J8776A)	Ports	4 open mini-GBIC (SFP) slots				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)</td> </tr> <tr> <td>Weight</td> <td>1.43 lb. (0.65 kg)</td> </tr> </table>	Dimensions	8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)	Weight	1.43 lb. (0.65 kg)
	Dimensions	8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)				
	Weight	1.43 lb. (0.65 kg)				
	Cabling	Cable type: Either single mode or multimode				
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g. J4858B, J4859C) are required. The HP X111 100M SFP LC FX Transceiver (J9054B) is not supported in this module.					
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.					

HP 20-port Gig-T / 4-port SFP v1 Module (J9033A)	Ports	4 open mini-GBIC (SFP) slots 20 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only				
	Physical characteristics	<table border="0"> <tr> <td>Dimensions</td> <td>8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)</td> </tr> <tr> <td>Weight</td> <td>1.52 lb. (0.69 kg)</td> </tr> </table>	Dimensions	8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)	Weight	1.52 lb. (0.69 kg)
	Dimensions	8.97(d) x 8.0(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)				
	Weight	1.52 lb. (0.69 kg)				
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Û differential 4 pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T				
Notes	When using mini-GBICs with this product, mini-GBICs with revision "B" or later (product number ends with the letter "B" or later, e.g. J4858B, J4859C) are required.					

Accessory Product Details

Services Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 1-port 10GbE X2 v1 Module (J8766A)

Ports 1 open 10-GbE X2 transceiver slot

Physical characteristics

Dimensions 8.97(d) x 8(w) x 1.75(h) in. (22.78 x 20.32 x 4.45 cm)

Weight 1.00 lb. (0.45 kg)

Environment

Operating temperature 32°F to 104°F (0°C to 40°C)

Notes Expected throughput is 2.5 to 7 Gbps, depending on packet size. Traffic from single MAC SA to single MAC DA will be at most 1 Gbps. The 4200v1 chassis can support upto 4 modules. 2 10G ports can be trunked together, cannot include other port speeds.
Available January 1, 2008.

Services Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X131 10G X2 SC ER Transceiver (J8438A)

HP X131 10G X2 SC ER Transceiver: An X2 format 10-gigabit transceiver with SC connectors using ER technology.

Ports 1 SC 10-GbE port (IEEE 802.3ae Type 10GBASE-ER); Duplex: full only

Connectivity

Connector type SC

Wavelength 1550 nm

Physical characteristics

Dimensions 3.48(d) x 1.42(w) x 0.43(h) in. (8.84 x 3.61 x 1.09 cm)

Weight 0.35 lb. (0.16 kg)

Transceiver form factor X2

Environment

Operating temperature 32°F to 104°F (0°C to 40°C)

Operating relative humidity 15% to 95%, noncondensing

Electrical characteristics

Power consumption typical 3 W

Power consumption maximum 4.5 W

Cabling

Cable type:: Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;

Cable length 2m to 30km (max 40km on engineered links)

Fiber type Single Mode

Notes Conditioning patch cord cables are not supported
For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.

Services Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X130 CX4 Optical Media Converter (J8439A) An optical media converter that connects to CX4 ports, providing 10-Gigabit connectivity up to 300 m on multimode fiber.	Physical characteristics	Dimensions	2.83(d) x 0.98(w) x 0.59(h) in. (7.19 x 2.49 x 1.5 cm)
	Cabling	Weight	.06 lb. (0.03 kg)
Notes	Maximum distance: • 62.5 µm multimode cable @ 150 MHz*km = 1-50 m • 50 µm multimode cable @ 500 MHz*km = 1-100 m • 50 µm multimode cable @ 2000 MHz*km = 1-300 m Duplex: full The CX4 Media Converter connects directly to the CX4 port, and a 12-strand multimode ribbon cable is used between CX4 Media Converters. The 12-strand multimode ribbon cable can have either 62.5 or 50 micron core diameters, terminated by standard Multiple Terminations Push-pull Latch (MTP) connectors in a crossover configuration. The ribbon cables are known as Multi-fiber Push (MPO). Users should specify a "crossover" (often called "key up/key up") configuration for the ribbon cable. Also, specify female-female cables to connect to ProCurve 10-GbE CX4 Media Converters. For a suggested vendor of MPO ribbon cables, please see the "Cabling" answers on the "ProCurve 10-GbE Transceivers" FAQs Web page.		
Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.		

HP X131 10G X2 SC SR Transceiver (J8436A) HP X131 10G X2 SC SR Transceiver: An X2 format 10-gigabit transceiver with SC connectors using SR technology.	Ports	1 SC 10-GbE port (IEEE 802.3ae Type 10GBASE-SR); Duplex: full only	
	Connectivity	Connector type	SC
Physical characteristics	Wavelength	850 nm	
Environment	Dimensions	3.48(d) x 1.42(w) x 0.43(h) in. (8.84 x 3.61 x 1.09 cm)	
Electrical characteristics	Weight	0.35 lb. (0.16 kg)	
Cabling	Transceiver form factor	X2	
	Operating temperature	32°F to 158°F (0°C to 70°C)	
	Operating relative humidity	0% to 95%, noncondensing	
	Nonoperating/Storage temperature	-40°F to 185°F (-40°C to 85°C)	
	Nonoperating/Storage relative humidity	0% to 95%, noncondensing	
	Altitude	up to 10,000 ft. (3 km)	
	Power consumption typical	1.7 W	
	Power consumption maximum	2.4 W	
	Cable type::		

Accessory Product Details

62.5/125 µm or 50/125 µm (core/cladding) graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively;

Maximum distance:

- 2-26m with 62.5 µm multimode cable @ 160 MHz*km
- 2-33m with 62.5 µm multimode cable @ 200 MHz*km
- 2-66m with 50 µm multimode cable @ 400 MHz*km
- 2-82m with 50 µm multimode cable @ 500 MHz*km
- 2-300m with 50 µm multimode cable @ 2000 MHz*km

Cable length 2-300m

Fiber type Multi Mode

Notes

For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended.

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X131 10G X2 CX4 Transceiver (J8440C)

Ports

1 CX4 10-GbE port (IEEE 802.3ak Type 10GBASE-CX4); Duplex: full only

Connectivity

Connector type CX4

HP X131 10G X2 CX4 Transceiver: An X2 format 10-gigabit CX4 transceiver.

Physical characteristics

Dimensions 3.54(d) x 1.42(w) x 0.53(h) in. (8.99 x 3.61 x 1.35 cm)

Weight 0.18 lb. (0.08 kg)

Transceiver form factor X2

Environment

Operating temperature 32°F to 131°F (0°C to 55°C)

Operating relative humidity 15% to 95%, noncondensing

Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)

Altitude up to 10,000 ft. (3 km)

Electrical characteristics

Power consumption typical 1.0 W

Power consumption maximum 3.3 W

Cabling

Maximum distance:
 • 15m with CX4 cables
 • 300m with optical media converter and multimode fiber cable

Notes

Connector: CX4; Duplex: full
 Use CX4 10-GbE cable (0.5-15 m) or HP X130 CX4 Optical Media Converter (J8439A).

For suggested vendors of CX4 cables, please see the "Cabling" answers on the "HP 10-GbE Transceivers" FAQs Web page.

Optical Media Converter (OMC) J8439A is not supported on the C version as the power supply for the OMC was removed in this design.

Accessory Product Details

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X111 100M SFP LC FX Transceiver (J9054B)

Ports

1 LC 100BASE-FX port (IEEE 802.3u Type 100BASE-FX); Duplex: half or full

Physical characteristics

Dimensions: 2.7(d) x 0.54(w) x 0.48(h) in. (6.86 x 1.38 x 1.22 cm)

Weight: 0.06 lb. (0.03 kg)

HP X111 100M SFP LC FX Transceiver: An SFP format 100-megabit transceiver with LC connectors using FX technology.

Environment

Operating temperature: 32°F to 158°F (0°C to 70°C)

Operating relative humidity: 5% to 95%

Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C)

Nonoperating/Storage relative humidity: 5% to 85%

Altitude: up to 10,000 ft. (3 km)

Cabling

Type:

- 62.5/125 μm or 50/125 μm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively;

Maximum distance:

- 2 km (full duplex) or 412 m (half duplex)

Notes

Transmitter wavelength: 1310nm

Power consumption is 1.1 watt maximum.

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J9054B 100-FX SFP-LC Transceiver" on the "HP Mini-GBICs and SFPs" Manuals Web page.

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X131 10G X2 SC LR Transceiver (J8437A)

Ports

1 SC 10-GbE port (IEEE 802.3ae Type 10GBASE-LR); Duplex: full only

Connectivity

Connector type SC

Wavelength 1310 nm

An X2 form-factor transceiver that supports the 10-Gigabit LR standard, providing 10-Gigabit connectivity up to 10 km on single-mode fiber.

Physical characteristics

Dimensions 3.48(d) x 1.42(w) x 0.43(h) in. (8.84 x 3.61 x 1.09 cm)

Weight 0.35 lb. (0.16 kg)

Transceiver form factor X2

Environment

Operating temperature 32°F to 104°F (0°C to 40°C)

Operating relative humidity 15% to 95%, noncondensing

Nonoperating/Storage temperature -40°F to 185°F (-40°C to 85°C)

Altitude up to 10,000 ft. (3 km)

Accessory Product Details

Electrical characteristics	Power consumption typical	2 W
	Power consumption maximum	3 W
Cabling	Cable type: Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1;	
	Maximum distance:	
	<ul style="list-style-type: none"> • 10 km 	
	Cable length	2m to 10km with 9/125 μm single-mode cable
	Fiber type	Single Mode
Notes	Conditioning patch cord cables are not supported For fiber patch cords, use Ultra Physical Contact (UPC) surface termination/polish. Angled Physical Contact (APC) is not recommended	
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP X131 10G X2 SC LRM Transceiver (J9144A)

An X2 form-factor transceiver that supports the 10-Gigabit LRM standard, providing 10-Gigabit connectivity up to 220 m on legacy multimode fiber.

Ports	1 SC 10-GbE port (IEEE 802.3aq Type 10GBASE-LRM); Duplex: full only	
Physical characteristics	Dimensions	3.54(d) x 1.59(w) x 0.7(h) in. (9.0 x 4.05 x 1.78 cm)
	Weight	0.35 lb. (0.16 kg)
	Transceiver form factor	X2
Environment	Operating temperature	32°F to 158°F (0°C to 70°C)
	Operating relative humidity	0% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 185°F (-40°C to 85°C)
	Altitude	up to 10,000 ft. (3 km)
Electrical characteristics	Power consumption typical	3.2 W
	Power consumption maximum	4.2 W
Cabling	Cable type: 62.5/125 μm or 50/125 μm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively (a mode conditioning patch cord may be needed in some multimode fiber installations);	
	Maximum distance:	
	<ul style="list-style-type: none"> • 0.5-220m with 62.5 μm multimode cable @ 160/500 MHz*km • 0.5-220m with 62.5 μm multimode cable @ 200/500 MHz*km • 0.5-100m with 50 μm multimode cable @ 400/400 MHz*km • 0.5-220m with 50 μm multimode cable @ 500/500 MHz*km 	

Accessory Product Details

- 0.5-220m with 50 µm multimode cable @ 1500/500 MHz*km

Cable length .5m to 220m

Fiber type Multi Mode

Notes

Wavelength: 1310nm

For OM3 cable (50 im multimode @ 1500/500 MHz*km), a mode-conditioning patch cord is not required. Other multimode cables may require mode-conditioning patch cords to achieve the maximum distances listed above.

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J9144A 10-GbE X2-SC LRM Optic" on the "HP 10-GbE Transceivers" Manuals Web page.

Power Consumption: 4W Max

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X112 100M SFP LC BX-D Ports Transceiver (J9099B)

A small form-factor pluggable (SFP) 100-Megabit BX (bi-directional) "downstream" transceiver that provides 100 Mbps full-duplex connectivity up to 10 km on one strand of singlemode fiber. The J9099B connects to the J9100B "upstream" transceiver, or to any IEEE-standard 100BASE-BX10-U ("upstream") device.

Physical characteristics

1 LC 100BASE-BX10 port (IEEE 802.3ah Type 100BASE-BX10-D); Duplex: full only

Dimensions

2.7(d) x 0.55(w) x 0.48(h) in. (6.86 x 1.39 x 1.22 cm)

Weight

0.04 lb. (0.03 kg)

Environment

Operating temperature

32°F to 158°F (0°C to 70°C)

Operating relative humidity

0% to 95%, noncondensing

Cabling

Nonoperating/Storage temperature

-40°F to 185°F (-40°C to 85°C)

Type:

Single-mode fiber optic, complying with ITU-T G.652;

Maximum distance:

- 0.5-10,000 m (single-mode fiber)

Notes

Transmit wavelength: 1550 nm. Receive wavelength: 1310 nm.

Power consumption is 1.1 watt maximum.

For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.

The J9099B connects to the J9100B "upstream" transceiver, or to any IEEE-standard 100BASE-BX10-U ("upstream") device. (A 100-BX-D transceiver can only connect to a 100-BX-U product. You cannot connect two 100-BX-D transceivers together.)

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X112 100M SFP LC BX-U Ports Transceiver (J9100B)

A small form-factor pluggable (SFP) 100-Megabit BX (bi-directional) "upstream" transceiver that provides 100 Mbps full-duplex connectivity up to 10 km on one strand of singlemode fiber. The J9100B connects to the J9099B "downstream" transceiver, or to any IEEE-standard 100BASE-BX10-D ("downstream") device.

Physical characteristics	Dimensions	1 LC 100BASE-BX10 port (IEEE 802.3ah Type 100BASE-BX10-U); Duplex: full only 2.7(d) x 0.55(w) x 0.48(h) in. (6.86 x 1.39 x 1.22 cm)
Environment	Weight	0.07 lb. (.03 kg)
Cabling	Operating temperature	32°F to 158°F (0°C to 70°C)
Notes	Operating relative humidity	0% to 95%, noncondensing
Services	Nonoperating/Storage temperature	-40°F to 185°F (-40°C to 85°C)
	Type:	Single-mode fiber optic, complying with ITU-T G.652;
	Maximum distance:	<ul style="list-style-type: none"> ● 0.5-10,000 m (single-mode fiber)
		For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page. The J9100B connects to the J9099B "downstream" transceiver, or to any IEEE-standard 100BASE-BX10- D ("downstream") device. (A 100-BX-U transceiver can only connect to a 100-BX-D product. You cannot connect two 100-BX-U transceivers together.) Transmit wavelength: 1310 nm. Receive wavelength: 1550 nm. Power consumption is 1.1 watts maximum.
		Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X121 1G SFP LC LH Transceiver (J4860C)

A small form-factor pluggable (SFP) Gigabit LH transceiver that provides a full-duplex Gigabit solution up to 70 km on single-mode fiber.

Ports	1 LC 100BASE-LH port (no IEEE standard exists for 1550 nm optics); Duplex: full only
Physical characteristics	Dimensions: 2.17(d) x 0.60(w) x 0.46(h) in. (5.5 x 1.53 x 1.18 cm) Weight: 0.04 lb. (0.02 kg)
Environment	Operating temperature: -40°F to 185°F (-40°C to 85°C) Operating relative humidity: 0% to 95% @ 77°F (25°C), noncondensing Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Altitude: up to 10,000 ft. (3 km)
Cabling	Cable type: <ul style="list-style-type: none"> ● Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1; Maximum distance: <ul style="list-style-type: none"> ● 10-70,000 m (single-mode fiber)

Accessory Product Details

Notes	Power consumption is 0.8 watts typical with 1 watt maximum at 100% utilization. For distances less than 20 km, a 10 dB attenuator must be used. For distances between 20 km and 40 km, a 5 dB attenuator must be used. Attenuators can be purchased from most cable vendors.
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP X121 1G SFP LC SX Transceiver (J4858C)

A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550 m on multimode fiber.

Ports	1 LC 1000BASE-SX port; Duplex: full only
Physical characteristics	Dimensions: 2.24(d) x 0.54(w) x 0.48(h) in. (5.69 x 1.37 x 1.22 cm) Weight: 0.04 lb. (0.02 kg) Transceiver form factor: SFP
Environment	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 5% to 85%, noncondensing Nonoperating/Storage temperature: -40°F to 203°F (-40°C to 85°C) Altitude: up to 10,000 ft. (3 km)
Electrical characteristics	Power consumption typical: 0.4 W Power consumption maximum: 0.7 W
Cabling	Type: <ul style="list-style-type: none">● 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Maximum distance: <ul style="list-style-type: none">● 2-220 m (62.5 µm core diameter, 160 MHz*km bandwidth)● 2-275 m (62.5 µm core diameter, 200 MHz*km bandwidth)● 2-500 m (50 µm core diameter, 400 MHz*km bandwidth)● 2-550 m (50 µm core diameter, 500 MHz*km bandwidth) Cable length: 2-550m Fiber type: Multi Mode
Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP X121 1G SFP LC LX Transceiver (J4859C)	Ports	1 LC 1000BASE-LX port (IEEE 802.3z Type 1000BASE-LX); Duplex: full only
	Physical characteristics	Dimensions: 2.24(d) x 0.54(w) x 0.486(h) in. (5.69 x 1.37 x 1.23 cm) Weight: 0.04 lb. (0.02 kg)
HP X121 1G SFP LC LX Transceiver: An SFP format gigabit transceiver with LC connectors using LX technology.	Environment	Operating temperature: 32°F to 158°F (0°C to 70°C) Operating relative humidity: 0% to 85%, noncondensing Nonoperating/Storage temperature: -40°F to 212°F (-40°C to 100°C) Altitude: up to 10,000 ft. (3 km)
	Cabling	Type: <ul style="list-style-type: none">• Either single mode or multimode; 62.5/125 µm or 50/125 µm (core/cladding) diameter, graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively; Low metal content, single-mode fiber-optic, complying with ITU-T G.652 and ISO/IEC 793-2 Type B1; Maximum distance: <ul style="list-style-type: none">• 2-550 m (multimode 62.5 µm core diameter, 500 MHz*km bandwidth)• 2-550 m (multimode 50 µm core diameter, 400 MHz*km bandwidth)• 2-550 m (multimode 50 µm core diameter, 500 MHz*km bandwidth)• 2-10,000 m (single-mode fiber)
	Notes	A mode conditioning patch cord may be needed in some multimode fiber installations. Wavelength: 1310nm Power Consumption: < 500mW Typical
	Services	Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
<hr/>		
HP X121 1G SFP RJ45 T Transceiver (J8177C)	Ports	1 RJ-45 1000BASE-T port (IEEE 802.3ab Type 1000BASE-T); Duplex: full only
	Physical characteristics	Dimensions: 2.71(d) x 0.54(w) x 0.55(h) in. (6.88 x 1.37 x 1.4 cm) Weight: 0.06 lb. (0.03 kg)
HP X121 1G SFP RJ45 T Transceiver: An SFP format gigabit transceiver with RJ45 connectors using 1000BaseT technology.	Environment	Operating temperature: 32°F to 158°F (0°C to 70°C); with 100 LFM airflow over the SFP module Operating relative humidity: 0% to 95% @ 75°F (25°C), noncondensing Nonoperating/Storage temperature: -40°F to 185°F (-40°C to 85°C) Nonoperating/Storage relative humidity: 0% to 95% @ 77°F (25°C), noncondensing Altitude: up to 10,000 ft. (3000 km)
	Cabling	Cable type: 1000BASE-T: Category 5 (5E or better recommended), 100 Ω differential 4-pair unshielded twisted pair (UTP) or shielded twisted pair (STP) balanced, complying with IEEE 802.3ab 1000BASE-T; Maximum distance:

Accessory Product Details

Notes	<ul style="list-style-type: none"> • 100 m <p>Power consumption is nominally 1 watt.</p> <p>For supported platforms and minimum software requirements to support this product, see the document titled "Support for the J8177C 1000Base-T Mini-GBIC" on the "HP Mini-GBICs and SFPs" Manuals Web page.</p> <p>The J8177C Gigabit copper mini-GBIC is not supported on dual-personality ports.</p> <p>The J8177C is capable of 100 Mb operation. This is supported on only the HP E8200zl, E5400zl, and HP E6200-24G-mGBIC v1 Switches using software version K.12.21 or later. Use the "auto-100" port setting to enable 100 Mb operation.</p> <p>Important: The earlier J8177B does not support 100 Mb operation. When used in the Switch gl 20-Port 10/100/1000 Module (J4908A), the J8177C mini-GBIC can be installed in either the upper or lower mini-GBIC port, but will block access to the other port.</p>
Services	<p>Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>

HP X122 1G SFP LC BX-D Transceiver (J9142B)

A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "downstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device.

Ports	1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-D); Duplex: full only										
Physical characteristics	<table border="0"> <tr> <td style="vertical-align: top;">Dimensions</td> <td>2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)</td> </tr> <tr> <td style="vertical-align: top;">Weight</td> <td>0.04 lb. (0.02 kg)</td> </tr> <tr> <td style="vertical-align: top;">Operating temperature</td> <td>32°F to 158°F (0°C to 70°C)</td> </tr> <tr> <td style="vertical-align: top;">Operating relative humidity</td> <td>0% to 95%, non-condensing</td> </tr> <tr> <td style="vertical-align: top;">Non-operating/ Storage temperature</td> <td>-40°F to 185°F -40°C to 85°C)</td> </tr> </table>	Dimensions	2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)	Weight	0.04 lb. (0.02 kg)	Operating temperature	32°F to 158°F (0°C to 70°C)	Operating relative humidity	0% to 95%, non-condensing	Non-operating/ Storage temperature	-40°F to 185°F -40°C to 85°C)
Dimensions	2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)										
Weight	0.04 lb. (0.02 kg)										
Operating temperature	32°F to 158°F (0°C to 70°C)										
Operating relative humidity	0% to 95%, non-condensing										
Non-operating/ Storage temperature	-40°F to 185°F -40°C to 85°C)										
Environment											
Cabling	<p>Type:</p> <p>Single-mode fiber optic, complying with ITU-T G.652;</p> <p>Maximum distance:</p> <ul style="list-style-type: none"> • 0.5-10,000 m (single-mode fiber) 										
Notes	<p>Transmit wavelength: 1490 nm. Receive wavelength: 1310 nm.</p> <p>Power consumption is 1 watt maximum.</p> <p>For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page.</p> <p>The J9142B connects to the J9143B "upstream" transceiver, or to any IEEE-standard 1000BASE-BX10-U ("upstream") device. (A 1000-BX-D transceiver can only connect to a 1000-BX-U product. You cannot connect two 1000-BX-D transceivers together.)</p>										
Services	<p>Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.</p>										

Accessory Product Details

HP X122 1G SFP LC BX-U Transceiver (J9143B)	Ports	1 LC 1000BASE-BX10 port (IEEE 802.3ah Type 1000BASE-BX10-U); Duplex: full only
A small form-factor pluggable (SFP) Gigabit-BX (bi-directional) "upstream" transceiver that provides a full-duplex Gigabit solution up to 10 km on one strand of single-mode fiber. The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device.	Physical characteristics	Dimensions 2.19(d) x 0.54(w) x 0.46(h) in. (5.57 x 1.37 x 1.18 cm)
	Environment	Weight 0.04 lb. (0.02 kg) Operating temperature 32°F to 158°F (0°C to 70°C) Operating relative humidity 0% to 95%, non-condensing Non-operating/Storage temperature -40°F to 185°F -40°C to 85°C
	Cabling	Type: Single-mode fiber optic, complying with ITU-T G.652; Maximum distance: <ul style="list-style-type: none">• 0.5-10,000 m (single-mode fiber)
	Notes	Transmit wavelength: 1310 nm. Receive wavelength: 1490 nm. For supported platforms and minimum software requirements to support this product, see the document titled "Support for the HP BX Transceivers" on the "HP Mini-GBICs and SFPs" Manuals Web page. The J9143B connects to the J9142B "downstream" transceiver, or to any IEEE-standard 1000BASE-BX10-D ("downstream") device. (A 1000-BX-U transceiver can only connect to a 1000-BX-D product. You cannot connect two 1000-BX-U transceivers together.) Power consumption is 1 watt maximum.
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 0.5 m Multimode OM3 LC/LC Optical Cable (AJ833A)	Cabling	Cable type: 50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m
		Maximum distance: 10Gbps Transfer Rate (Ethernet): 300m
	Notes	Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end. <ul style="list-style-type: none">• Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm• Optical glass: Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.• Optical glass: Bandwidth: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: 600 / 600 meters @850/1300nm

Accessory Product Details

- for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber and designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 1 m Multimode OM3 LC/LC Optical Cable
(AJ834A)

Cabling

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 um fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0um Cladding diameter: 125 ± 2.0um Coating diameter: 245 ± 10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Accessory Product Details

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP 2 m Multimode OM3 LC/LC Optical Cable (AJ835A)

Cabling

Cable type:

50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 5 m Multimode OM3 LC/LC Optical Cable **Cabling**
(AJ836A)

Cable type:

50/125 µm core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: This specification defines the detail requirements for a tight buffered duplex fiber optic multimode OM3 50/125 um fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0um Cladding diameter: 125 ± 2.0um Coating diameter: 245 ± 10um
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125um multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 15 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ837A)

Cable type:

50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 30 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ838A)

Cable type:

50/125 μm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 μm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: $50 \pm 3.0\mu\text{m}$ Cladding diameter: $125 \pm 2.0\mu\text{m}$ Coating diameter: $245 \pm 10\mu\text{m}$
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125 μm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP 50 m Multimode OM3 Cabling
LC/LC Optical Cable
(AJ839A)

Cable type:

50/125 µm (core/cladding) diameter, multimode fiber optic, with effective modal bandwidth of 2000 MHz/km as detailed in TIA-492AAAC for distances of up to 300 m;

Maximum distance:

10Gbps Transfer Rate (Ethernet): 300m

Notes

Cable Specs: Tight buffered duplex fiber optic multimode OM3 50/125 µm fiber optic cable and Ethernet assembly with LC duplex connectors on one end and LC duplex connectors on other end.

- Dimensions: Core diameter: 50 ± 3.0µm Cladding diameter: 125 ± 2.0µm Coating diameter: 245 ± 10µm
- Optical Glass Bandwidth: For LED sources: 1500/500 MHz-km @850/1300nm.
- Optical Glass: For Laser sources: 2000/500 MHz-km @850/1300nm. VCSEL Laser sources: Shall achieve 600 / 600 meters @850/1300nm for Gigabit Ethernet compliant links.
- CABLE: The cable is duplex zipcord graded index 50/125µm multimode optical fiber. The cable is designed to work in both the 850 and 1300 nm wavelength windows.
- BULK CABLE & CABLE ASSEMBLY CONFIGURATION:
- Jacket Material: Riser Grade - Low Smoke Zero Halogen thermoplastic.
- Jacket Color: Aqua for OM3 multimode per TIA 598
- Boot Color: White
- Insertion Loss: less than 0.5 dB @ 850 with LED source, 0.003 dB/M added for lengths > 30 meters.
- Maximum Cable attenuation: 3.0 dB/km @ 850 nm, 1.0 dB/Km @ 1310 nm @ 23°C as tested in accordance with EIA 455-46.
- Weight: Air Packed Weight: 1 LB Net Weight: 0.454Kg

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
1m Cable (QK732A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core Diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
2m Cable (QK733A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
5m Cable (QK734A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
15m Cable (QK735A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um ±3um, Cladding diameter: 125um ±2um; Coating diameter: 245 ± 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
30m Cable (QK736A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um \pm 3um, Cladding diameter: 125um \pm 2um; Coating diameter: 245 \pm 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

**HP Premier Flex LC/LC
Multi-mode OM4 2 fiber
50m Cable (QK737A)**

Notes

Cable Specs: Graded-index, "bendable" fiber optic multimode OM3+ 50/125um duplex cable and Ethernet assembly with LC duplex connectors on each end.

- Core diameter: 50um \pm 3um, Cladding diameter: 125um \pm 2um; Coating diameter: 245 \pm 10um
- Bandwidth: 3000 MHz-km @ 850nm (Laser)
- Jacket Color: Blue
- Jacket Material: Riser Grade – Low Smoke Zero Halogen (LSZH) thermoplastic
- Boot Color: White
- Outer Jacket Print: HP PremierFlex OM3+ Fiber Optic Cable, 50/125um, Type OFNR (UL), LSZH, cUL, OFN FT4, ROHS. Cable also has a longitudinal white stripe that runs the entire length of the cable.
- Insertion Loss: Less than 0.5dB @ 850nm with LED source, 0.003dB/m added for lengths >30m
- Maximum Cable Attenuation: 3.0 dB/km @ 850nm, 1.0 dB/km @ 1310nm @ 23°C as tested in accordance with EIA 455-45

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

HP gl/xl/vL Switch Redundant Power Supply (J4839A)	Physical characteristics	Dimensions	7.9(d) x 6.3(w) x 5.0(h) in. (20.07 x 16.0 x 12.7 cm)
	Electrical characteristics	Weight	5.55 lb. (2.5 kg)
		Voltage	100-127/200-240 VAC
		Current	8.2/3.8 A
		Frequency	50/60 Hz
	Notes	For additional RPS specification information, see the data sheet for the product in which the RPS is being installed.	
	Services	Refer to the HP website at: www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.	

HP Identity Driven Manager 3.0 Software-- 500-User License (J9438A)	Identity Driven Manager 3.0 software and license for managing up to 500 users.		
	RADIUS server support	Microsoft Network Policy Server on Windows Server 2008 (32-bit) Microsoft Internet Authentication Service (IAS) on Windows Server 2003 (32-bit) FreeRADIUS supplied with Red Hat Enterprise Linux (4.7 and 5.2) RADIUS on the Network Access Controller 800 FreeRADIUS supplied with SuSE Linux Enterprise Server (9.3 and 10.2)	
	Features	Intuitive Explorer-style interface OpenView NNM integration Application of policies by user identity <ul style="list-style-type: none">● Auto VLAN assignment● Auto set quality of service by user● Auto set bandwidth assignment by user Rule-based access rights deployment Dynamic rights assignment based on: <ul style="list-style-type: none">● Time● Location● User system Auto-discovery of: <ul style="list-style-type: none">● RADIUS servers● Realms● Users	
	Notes	Additional specifications <ul style="list-style-type: none">● Supports environments with up to 10,000 users.● Supports up to 10 RADIUS servers with HP Identity Driven Manager agents installed. Requires the HP PCM Plus 3.0 or greater network management platform.	

Accessory Product Details

Services	<ul style="list-style-type: none">• Please see HP PCM Plus 3.0 for hardware and software system requirements. 3-Year, 9x5 SW phone support, software updates (UQ124E) 3-year, 24x7 SW phone support, software updates (UQ125E) Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.
-----------------	--

HP Identity Driven Manager 3.0 Software-- Additional 1,000-User License (J9440A)

License to add support for managing an additional 1,000 users with the Identity Driven Manager 3.0 product.

RADIUS server support —

Features —

Notes Additional specifications

- Supports environments with up to 10,000 users.
- Supports up to 10 RADIUS servers with HP Identity Driven Manager agents installed.

Requires the HP PCM Plus 3.0 or greater network management platform.

- Please see HP PCM Plus 3.0 for hardware and software system requirements. Requires the HP Identity Driven Manager 3.0 base product (J9438A).

Multiple licenses for additional 1,000 users can be added to the base HP Identity Driven Manager product to support larger numbers of users.

Services 3-year, 24x7 SW phone support, software updates (UQ119E)
3-Year, 9x5 SW phone support, software updates (UQ118E)

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

**HP Identity Driven
Manager 3.0 Software--
Unlimited-User License
(J9439A)**

Identity Driven Manager 3.0 software and license for managing an unlimited number of users.

RADIUS server support

Microsoft Network Policy Server on Windows Server 2008 (32-bit)
Microsoft Internet Authentication Service (IAS) on Windows Server 2003 (32-bit)
FreeRADIUS supplied with Red Hat Enterprise Linux (4.7 and 5.2)
RADIUS on the Network Access Controller 800
FreeRADIUS supplied with SuSE Linux Enterprise Server (9.3 and 10.2)

Features

Intuitive Explorer-style interface
OpenView NNM integration
Application of policies by user identity

- Auto VLAN assignment
- Auto set quality of service by user
- Auto set bandwidth assignment by user

Rule-based access rights deployment

Dynamic rights assignment based on:

- Time
- Location
- User system

Auto-discovery of:

- RADIUS servers
- Realms
- Users

Notes

Additional specifications

- Supports environments with up to 10,000 users.
- Supports up to 10 RADIUS servers with HP Identity Driven Manager agents installed.

Requires the HP PCM Plus 3.0 or greater network management platform.

Please see HP PCM Plus 3.0 for hardware and software system requirements.

3-year, 24x7 SW phone support, software updates (UQ133E)

3-Year, 9x5 SW phone support, software updates (UQ132E)

Services

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Accessory Product Details

To learn more, visit: www.hp.com/networking

© Copyright 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.