
#### **Overview**




1. Integrated USB 2.0 hub

0

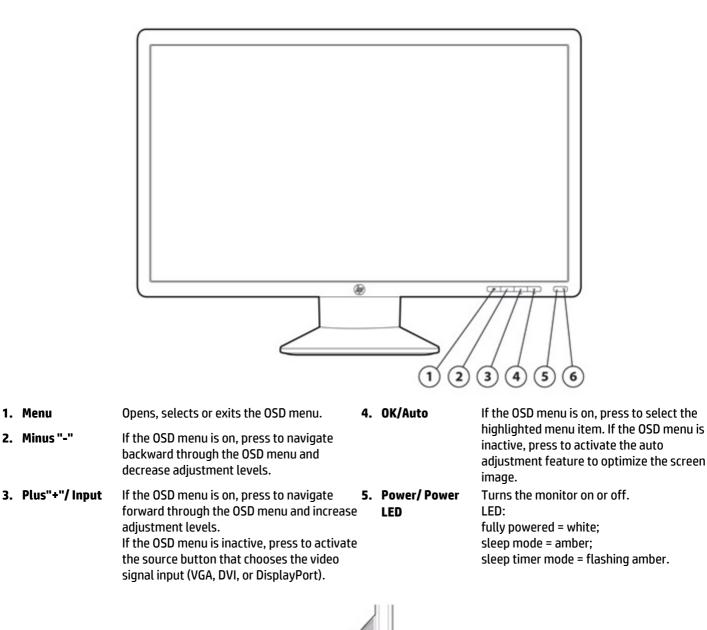

Overview

#### **Boost Productivity with Dual Monitor Work Solution**

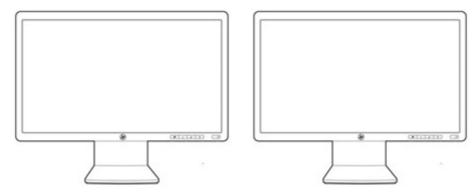

(Multi-monitor support depends on your PC capability. Monitors are sold separately.)

Models

D7Z72AA



Panel	Туре	IPS w/LED backlight
	Viewable Image Area (diagonal)	<b>68,5 cm</b> , (27 in.) widescreen; diagonally measured
	Active Area (W × H)	<b>59,8 x 33,6 cm</b> , (23.5 x 13.3 in.)
	Aspect Ratio	16:9
	Viewing Angle (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	250 cd/m <sup>2</sup>
	<b>Static Contrast Ratio</b> (typical)*	1000:1
	<b>Dynamic Contrast Ratio</b> (typical)*	5,000,000:1
	<b>Response Time</b> (typical) <sup>;</sup>	* 7ms w/overdrive (gray to gray)
	Pixel Pitch	0.3114 mm
	Backlight Lamp Life (to half brightness)*	30,000 hours minimum
	Color Gamut (typical)*	72%
	Color Support**	Can display up to 16.7 million colors
	• •	ations represent the typical specifications provided by HP's component rformance may vary either higher or lower. chnology.
On Screen Display	<b>Buttons or Switches</b>	Menu, Minus ("-"), Plus ("+") /Input Control, OK/Auto, Power
(OSD) <b>Controls</b>	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
	User Controls	Brightness, Contrast, Color, Image Control, OSD control, Management, Language, Information, Factory Reset, Input Control
Signal Interface/	Horizontal Frequency	24 to 94 kHz
Performance	Vertical Frequency	50 to 76 Hz
	Native Resolution	1920 x 1080 @ 60 Hz
	<b>Preset VESA Graphic</b> <b>Modes</b> (non-interlaced)	1680 x 1050 @ 60 Hz 1600 x 900 @ 60 Hz 1440 x 900 @ 60 Hz 1366 x 768 @ 60 Hz 1280 x 1024 @ 60 Hz 1280 x 800 @60 Hz 1280 x 720 @ 60 Hz 1024 x 768 @ 60 Hz 800 x 600 @ 60 Hz 720 x 400 @ 70 Hz 640 x 480 @ 60Hz
	Maximum Pixel Clock Speed	170 MHz
	User Programmable Modes	Yes (10)



	Anti-Glare	Yes	
	Default Color	6500 K	
	Temperature		
Video/Other Inputs	Plug and Play	Yes	
	Input Connectors	VGA (analog), DVI-D, Dis	playPort 1.2 (HDCP support on DVI-D and DisplayPort)
	USB	Integrated USB 2.0 hub	with (2) Downstream and (1) Upstream ports
	USB Cable	(1)USB cable, <b>2 m</b> (6.5 ft	t)
	Video Cables	(1)VGA, (1)DisplayPort	
			d (1)DVI-D cables are included. DisplayPort cable is only dels and in limited countries.
	Video Cable Lengths	VGA <b>1,8 m</b> (5.9 ft); Displa APJ specific: DVI-D <b>2 m</b> (	ayPort <b>2 m</b> (6.5 ft) (6.5 ft) (see APJ specific note above)
	Audio	N/A	
	Audio Cable Length	N/A	
Power	Power Supply	Internal	
	Input Power	100-240V at 50/60Hz	
	Typical Power Consumption	35 W	
	Maximum	40 W	
	Power Saving	0.5 W	
	Power Cable Length	<b>1,9 m</b> (6.2 ft.)	
Mechanical	<b>Dimensions</b> (W x D x H)	Unpacked w/stand	<b>64,2 x 27,85 x 53,21 cm</b> (25.28 x 10.96 x 20.95 in)
		Unpacked w/o stand	64,2 x 5,22 x 38,73 cm
		(head only)	(25.28 x 2.06 x 15.25 in)
		Packaged	70,2 x 17,1 x 60 cm
		Pace area (featurint)	(27.64 x 6.73 x 23.62 in)
		<b>Base area</b> (footprint)	<b>27,85 x 13,07 cm</b> (10.96 x 5.14 in)
	Weight	Head Only	<b>4,9 kg</b> (10.8 lb)
	-	Unpacked	<b>7,7 kg</b> (16.98 lb)
		Packaged	<b>10 kg</b> (22.04 lb)
	Tilt Range	-5° to +30°	-
	Swivel Range	Yes, 360°	
	Height Adjustable	Yes, 150 mm	
	<b>Pivot Rotation</b>	Yes, 90°	
	Base	Attached	
Environmental	Temperature - Operating	<b>5° to 35° C</b> (41° to 95° F)	)
	Temperature - Non- operating	<b>-20° to 60° C</b> (-4° to 140	)° F)



	Humidity - Operating	20% to 80% non-condensin	g	
	Humidity - Non- operating	5% to 95%, 38.7° C max we	t-bulb	
	Altitude - Operating	<b>0 to 5,000 m</b> (16,404 ft)		
	Altitude - Non- operating	<b>0 to 12,192 m</b> (0 to 40,000	ft)	
	White LED Backlight	Yes		
	CCFL Panel	No		
	Arsenic-Free Display Glass	Yes		
	Low Halogen <sup>4</sup>	Yes		
	Mercury- Free Display Backlighting	Yes		
Environmental Data	Eco-Label Certifications & Declarations	This product has received o approvals and may be label	r is in the process of being ce ed with one or more of these	_
	Energy Consumption (in accordance with US		IP registers commercial disp et for registration status in ye	,
	Energy Star test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
	Normal Operation	19.90 W	19.92 W	20.03 W
	Sleep	0.64 W	0.64 W	0.65 W
	Off	0.23 W	0.25 W	0.23 W
	Heat Dissipation*	115VAC, 60 Hz	230VAC, 50 Hz	100VAC, 60 Hz
	Normal Operation	68 BTU/hr	68 BTU/hr	69 BTU/hr
	Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
	Off	1 BTU/hr	1 BTU/hr	1 BTU/hr
	* Heat dissipation is calcu hour.	lated based on the measured	l watts, assuming the service	e level is attained for one
	Additional Information	Substances (RoHS) d	npliance with the Restriction: irective - 2002/95/EC. signed to comply with the W	

- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per



Technical Specifications			
	• This produc	and ISO1043. ct contains 15.2% post-consumer recycle ct is 98.5% recycle-able when properly di	
Packaging Materials	External:	PAPER/Corrugated	1440g
	Internal:	PLASTIC/EPS (Expanded Polystyrene)	302.4g
		PLASTIC/EPE-Expanded Polyethylene	23g
		PLASTIC/Polyester	7.5g
RoHS Compliance	laws and regulatic Substances (RoHS meeting the requi 2006, RoHS subst legal limits) for al where it is widely	is committed to compliance with all appli ons, including the European Union Restric o) Directive. HP's goal is to exceed compli rements of the RoHS Directive on a work ances will be virtually eliminated (virtual I HP electronic products subject to the Ro recognized that there is no technically fe emption under the EU RoHS Directive).	tion of Hazardous ance obligations by Iwide basis. By July 1, ly = to levels below HS Directive, except
Material Usage	regulatory limits (	not contain any of the following substar refer to the HP General Specification for m/hpinfo/globalcitizenship/environmen s.html):	the Environment at:
	retardants Cadmium Chlorinated Chlorinated Formaldeh Halogenate Lead carbo Lead and Le Mercuric O Nickel - fini frequently Ozone Depl	minated Flame Retardants - may not be in plastics I Hydrocarbons I Paraffins yde ed Diphenyl Methanes nates and sulfates ead compounds kide Batteries shes must not be used on the external su handled or carried by the user. leting Substances	
	<ul> <li>Polybromir</li> <li>Polybromir</li> <li>Polychlorin</li> <li>Polychlorin</li> <li>Polyvinyl C packaging I</li> <li>Radioactive</li> </ul>	nated Biphenyls (PBBs) nated Biphenyl Ethers (PBBEs) nated Biphenyl Oxides (PBBOs) ated Biphenyl (PCB) nated Terphenyls (PCT) hloride (PVC) - except for wires and cable nas been voluntarily removed from most e Substances n (TBT), Triphenyl Tin (TPT), Tributyl Tin O	applications.
Packaging	-	guidelines to decrease the environmenta	



Technical Specifica	tions	
		<ul> <li>Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li> <li>Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li> <li>Design packaging materials for ease of disassembly.</li> <li>Maximize the use of post-consumer recycled content materials in packaging materials.</li> <li>Use readily recyclable packaging materials such as paper and corrugated materials.</li> <li>Reduce size and weight of packages to improve transportation fuel efficiency.</li> <li>Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li> </ul>
	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.
	Hewlett-Packard	For more information about HP's commitment to the environment:
	Corporate Environmental Information	Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/ envmanagement.html
<b>Options</b> (sold separately)	HP LCD Monitor Quick Release – Part number EM870AA <sup>1</sup>	An easy-to-use, VESA-compliant, LCD monitor mounting solution that allows you to quickly and securely attach an LCD monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpecs document.
	HP USB Graphics Adapter–Part number NL571AA	Enables connection of up to six simultaneous displays to help you boost productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.
	HP Business PC Security Lock Kit–Part number PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.



	HP LCD Speaker Bar – Part number NQ576AA	Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and dual external headphone jacks. Sold separately. For more information, refer to the product's QuickSpecs.
	HP DVI to DVI cable – Part number DC198A	Connect to external monitors with a DVI connector from an HP Compaq Business Desktop computer with a DVI connector. The cable is a single link cable with DVI-D support on both connectors. The cable will connect to either a DVI-D or DVI-I connector on the monitor and the graphics card.
What's in the box?	Monitor and Accessories	HP EliteDisplay E271i 27-inch IPS LED Backlit Monitor; VGA cable; DisplayPort cable; USB cable; AC Power cable.
		<b>APJ Specific</b> : (1)VGA and (1)DVI-D cables are included. DisplayPort cable is only available on limited models and in limited countries.
	Documentation	Printed documentation and CD
	Featured Software	Yes, HP Display Assistant
Other	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.
	Color	Black
	VESA External Mounting	Yes (one set of standard 4-hole pattern, 100 mm)
	Security Lock-Ready	Yes
	Country of Origin	China
Certification and Compliance	CE, CB ,KC, KCC, NOM, PSB, ICE, TUV-S, CCC, CEL Grade 1, CECP, SEPA, TCO Certified Edge, EPA, ISC, VCCI ,FCC, Taiwan: BSMI , ENERGY STAR®, EPEAT® Gold <sup>3</sup>	
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.	
Service and Warranty	Protected by HP, including a 3 year standard limited warranty. Optional Care Pack Services are extended service contracts which go beyond your standard warranties. <sup>2</sup>	



#### **Technical Specifications**

© Copyright 2013 Hewlett-Packard Development Company, L.P.

ENERGY STAR® is a US registered mark of the United States Environmental Protection Agency.

<sup>1</sup>The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

<sup>2</sup> HP Care Pack Services extend service contracts beyond the standard warranties. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at http://www.hp.com/hps/carepack.

<sup>3</sup> EPEAT<sup>®</sup> Gold registered models of this product are available where HP registers commercial display products. See www.epeat.net for registration status in your country.

<sup>4</sup> External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

